



APPLICATIONS

- Elevators
- Lifting machines
- Industry applications

TECHNICAL SPECIFICATIONS

- Normally open contact
- Max Contact Rating: 60VA
- Max Switching Voltage: 250VDC / 250VAC
- Max Switching Current: 1A

TECHNICAL FEATURES


- Min insulation resistance: 10^{10} Ohm
- Typ. resonant frequency: 1000Hz
- Working temperature: -30C to 90C

SPECIFICATIONS OF MATERIAL

- Housing material: P.A.
- Cable material: PVC / Cable section: 2x0.50mm²
- Cable length: 850mm or 2000mm



PROXIMITY MAGNETIC SWITCH MS10 60 1A (NORMALLY OPEN)

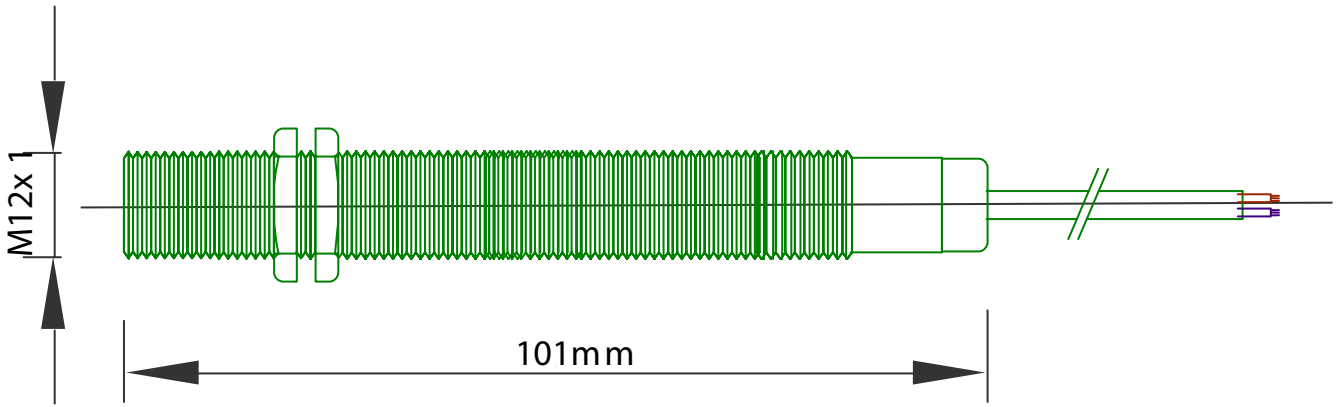

MS10 60 1A

ELECTRICAL CONNECTION


ANALYSIS LTD



NORMALLY OPEN CONTACT



OPERATION DISTANCES OF MS10 60 1A N.O. FROM PLASTOFERITTE WITH DIMENSIONS 200x20x6mm

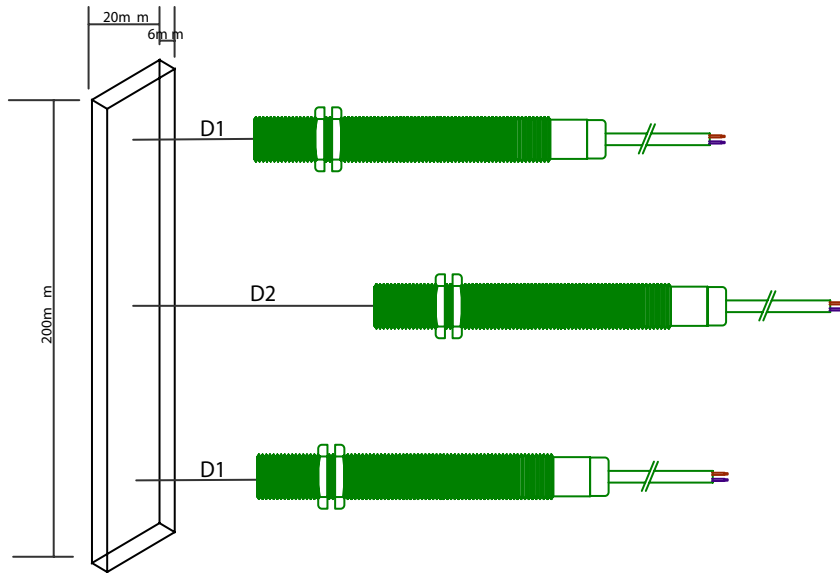

D1: from 30mm to 34mm
 D2: from 49mm to 53mm

MS10 60 1A

ORDER CODE

ANALYSIS LTD



ORDER CODE FOR MS10 60 1A N.O.

PROXIMITY MAGNETIC SWITCH MS10 60 1A NO

LENGTH OF CABLE

850mm

850

2000mm

2000

ORDERING EXAMPLE: MS10 60 1A-850

Delta Velestino, 375 00 Magnesia, Greece tel. 0030 2425024248

www.analysis-ltd.com.gr

Version: MS10601A.1.19-02-17

Analysis Ltd can accept no responsibility for errors in datasheets, catalogues and other electronic or printed materials. Analysis Ltd reserves the right to change specifications without notice. All trademarks in this material are property of Analysis Ltd. Copyright© 2017 Analysis Ltd. All rights reserved.



Analysis Ltd applies a certified ISO: 9001 quality management system.

Certificate No: PIR6046243