



APPLICATIONS

Elevators
Lifting machines
Industry applications

TECHNICAL SPECIFICATIONS

Normally open contact
Max Contact Rating: 120VA
Max Switching Voltage: 250VDC / 250VAC
Max Switching Currnt: 3A

TECHNICAL FEATURES


Min insulation resistance: 10^{10} Ohm
Typ. resonant frequency: 120Hz
Working temperature: -30C to 90C

SPECIFICATIONS OF MATERIAL

Housing material: P.A.
Cable material: PVC / Cable section: 2x0.50mm²
Cable length: 850mm or 2000mm



PROXIMITY MAGNETIC SWITCH MS10 120 3A (NORMALLY OPEN)

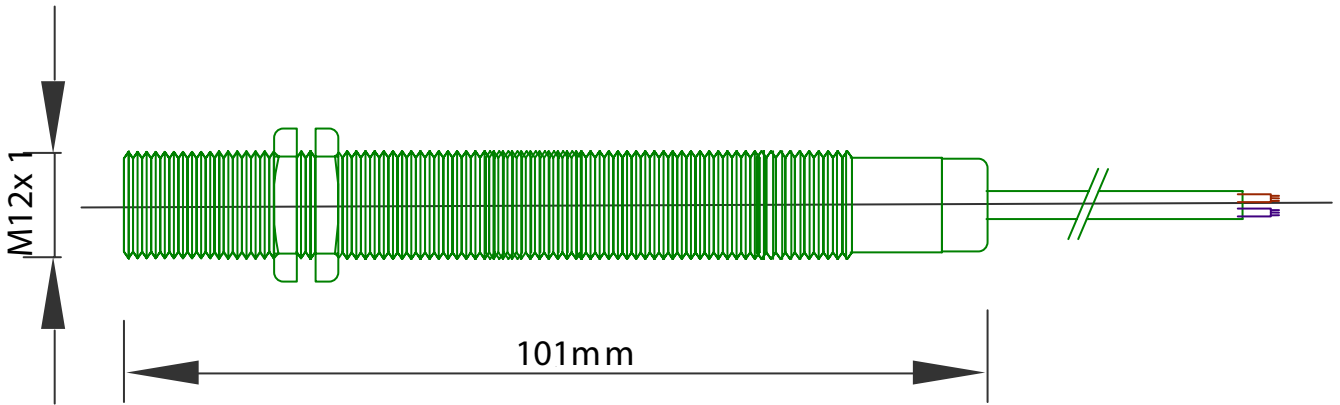


MS10 120 3A

ELECTRICAL CONNECTION


ANALYSIS LTD



NORMALLY OPEN CONTACT



OPERATION DISTANCES OF MS10 120 3A N.O. FROM PLASTOFERITTE WITH DIMENSIONS 200x20x6mm

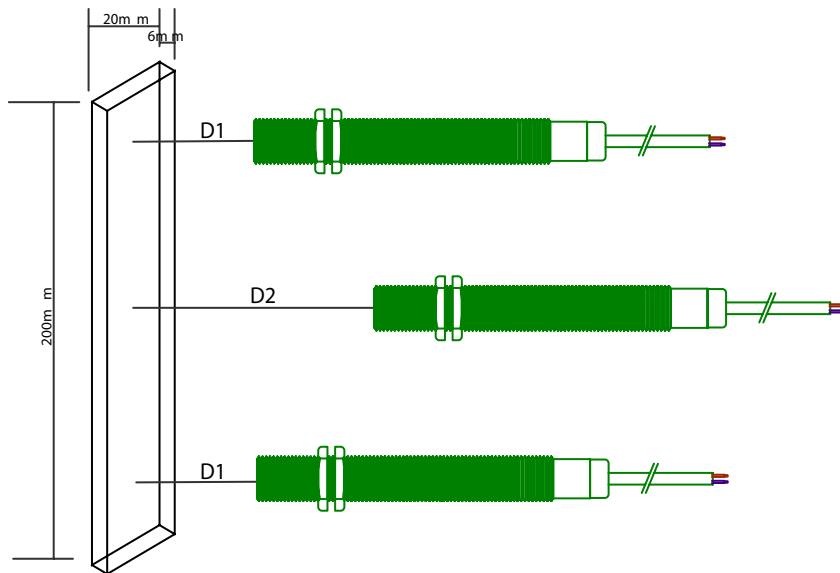

D1: from 9mm to 14mm
D2: from 17mm to 22mm



MS10 120 3A

ORDER CODE

ANALYSIS LTD



ORDER CODE FOR MS10 120 3A N.O.

PROXIMITY MAGNETIC SWITCH MS10 120 3A NO
LENGTH OF CABLE

850mm	850
2000mm	2000

ORDERING EXAMPLE: MS10 120 3A-850

Delta Velestino, 375 00 Magnesia, Greece tel. 0030 2425024248

www.analysis-ltd.com.gr

Version: MS10120.119-02-17

Analysis Ltd can accept no responsibility for errors in datasheets, catalogues and other electronic or printed materials. Analysis Ltd reserves the right to change specifications without notice. All trademarks in this material are property of Analysis Ltd. Copyright© 2017 Analysis Ltd. All rights reserved.



Analysis Ltd applies a certified ISO: 9001 quality management system.